
BRIGHTECH

The Nola Floor Lamp

ASSEMBLY

1. Line up the lower pole (part F) with the base (part A) in a 90 degree angle. Slide the threading on the pole into the hole on the upper base (part A) and then the lower base (part B).
2. Slide the flat washer (part C) and the nut (part D) over the threading underneath the bases, and tighten into place with the wrench (part E), taking care that the pole is screwed in straight.
3. Screw the upper pole of the lamp (part G) onto the lower pole using the provided screws (part H) and the allen key (part I).
4. Slide the LEDs (part J) into place on the upper pole's sockets. Then slide the globes (part K) over the LEDs and screw into place.
5. Plug the power adapter cord (part L) into the cord that comes out of the lamp.
6. Plug the opposite end of the cord into a 110v outlet. Review reverse side of this page for important warnings and safety information prior to use.

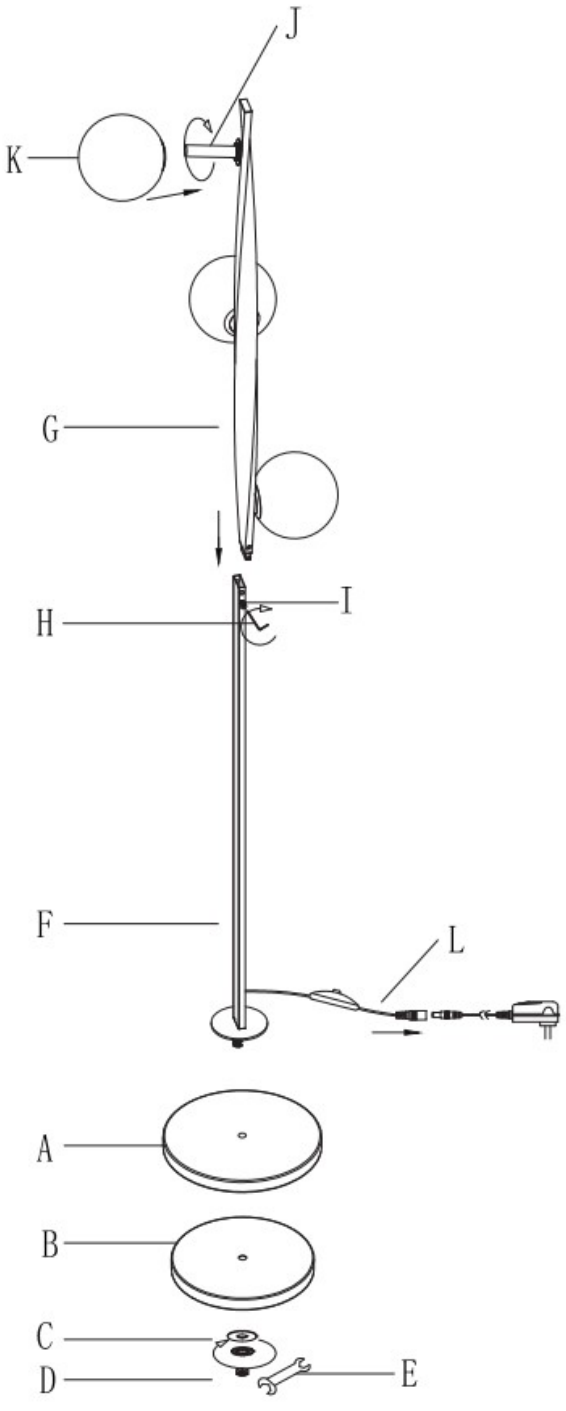

OPERATION & USE

POWER & DIMMING : The power button is located on the cord of the lamp, in the form of the foot pedal. Simply tap the foot pedal to turn on. To dim the lamp or to turn it off, tap the button again. The lamp will first cycle through two dimmer brightness levels, and on the third tap, it will shut off.

USING WITH A WALL SWITCH: To use the lamp with a wall switch, simply plug it into an outlet that is built to be powered by the wall switch. The lamp will be able to be turned on and off via the switch, but the dimming needs to be controlled via the power button on the body of the lamp.

SAFETY & WARNINGS

This product is intended for 110v voltage only. Use with a higher voltage is likely to cause damage.

Do not bring this product or any of its components in contact with any water or extreme heat.

Keep between 23 degrees F - 104 degrees F, and below a humidity of 95%.

Do not use this product outside of its intended and advertised use. Do not tamper with internal parts or wiring.

Brightech is not responsible for modifications to this product or any of its electrical components, or for use with externally purchased parts not manufactured to come with this product.

FURTHER RESOURCES | Diagnosis

Thanks to our great track-record with these lights, reported problems have been few and far in-between. But we know, sometimes things can happen. If your product is experiencing any abnormalities, please see below for some more insight as to what may be happening & if there's anything you can do to troubleshoot.

Note: Never make any temporary or permanent alterations to any parts or components of this product.

Physical or Cosmetic Damage: If the damaged portions of the product are among the separate pieces listed on the opposite side of this guide (see: Assembly), these pieces might be able to be replaced. The head, body, and base of this lamp are fully wired together and are considered one piece.

Replacing the Lights or Wiring: The LEDs and wiring are built directly in to the head of the lamp for maximum durability and are non-replaceable at this time.

Light Flashing or Strobing: A malfunction of this sort may suggest a problem with the power adapter cord, necessitating a replacement of this cord.

Lights Dim: If the LEDs have dimmed, or the lamp has failed after first not performing at max brightness, this may suggest a failure of the actual LED components, which may be replaceable, subject to availability.

SPECIFICATIONS

Wattage | 16 watts
Color Temperature | 3000 kelvin
Brightness | 1800 lumens
Adapter | Input AC100-240V | Output DC24V/1A

Need More Help?

Find us on the web
www.brightech.com

Connect with us
@wearebrightech

For questions or support
www.brightech.com/contact