BRIGHTECH


The Aria Shelf Lamp

INCLUDED IN BOX

(1) Corded LED pole (Part A)
(3) LED poles (Part B)
(2) Corded poles (Part C)
(10) Standard poles (Part D)
(1) Weighted base shelf (Part E)
(3) Standard shelves (Part F)
(1) Wireless chargin shelf (Part G)
(4) Base stands with floor caps (Part H)
(4) Upper pole caps (Part I)
(1) Power adapter cord (Part J)

ASSEMBLY

1. Line up the weighted base shelf (part E) on top of the base stands (part H), with the weighted portion facing down.
2. Screw the corded LED pole (part A) onto one corner. Screw a corded standard pole (part C) onto an adjacent corner. Then screw two standard poles (Part D) onto the remaining corners.
3. Place a standard shelf (part F) onto the assembled pieces. In a similar fashion as the previous step, screw an LED pole (Part B), the remaining corded pole, and two standard poles onto the next shelf board, taking care to match up with the pole types beneath.
4. Place the wireless charging shelf (part G) onto the assembled pieces, with the charging basin facing down. Screw in an LED pole to continue the lighted line, and screw 3 standard poles onto the remaining corners.
5. Place a standard shelf above the assembled pieces. Continue the lighted LED line and standard pole progression.
6. Repeat step 5 with the remaining shelf and poles.
7. Screw pole caps (part I) onto the upper poles to secure shelf and assembly.
8. Connect the power adapter cord (part J) to the lamp, and then plug the cord into a 110v outlet. Review the reverse side of this page for important safety and warnings prior to use.

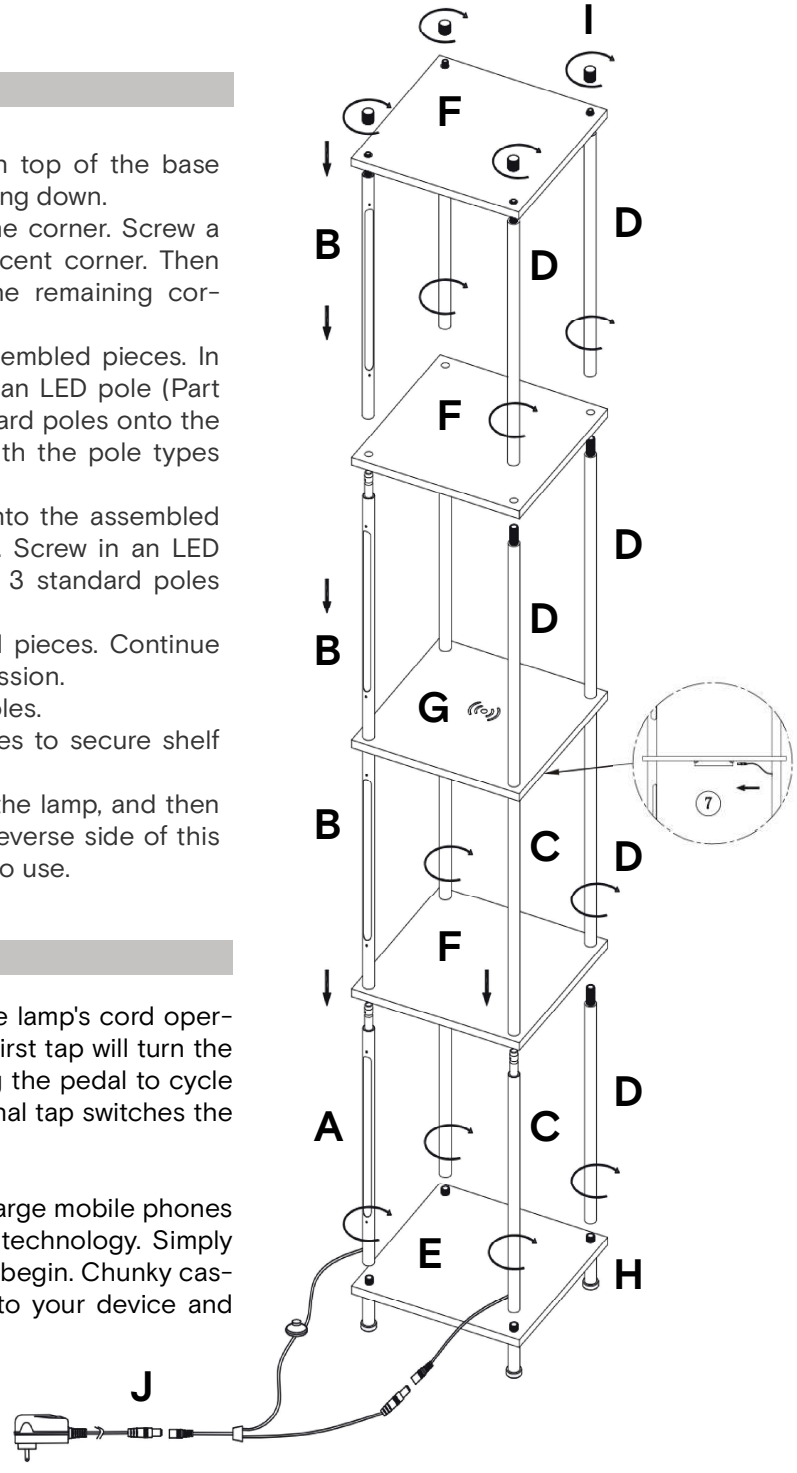

OPERATION & USE

THE FOOT PEDAL : The foot pedal located on the lamp's cord operates as both the power control and the dimmer. First tap will turn the lamp On at its brightest setting. Continue tapping the pedal to cycle through two dimmer light levels. The fourth and final tap switches the lamp Off.

WIRELESS CHARGING : The charging port will charge mobile phones that are built compatible with wireless charging technology. Simply place your phone onto the shelf and charging will begin. Chunky cases may hamper the charging port's connection to your device and may need to be removed if preventing proper connection. Do not place metal items or metal phone cases onto the charging shelf as they block and may damage the wireless charging signal.

OPERATION & USE

USING WITH A WALL SWITCH : The Aria can be turned on and off via a wall switch, while brightness settings can only be changed with the foot pedal. When using the lamp with a wall switch, it will remember its settings: If the lamp is turned off at a dimmer level than the maximum, it will turn back on at that same level. To return the max brightness, simply cycle through with the foot pedal.

SAFETY & WARNINGS

This product is intended for 110v voltage only. Use with a higher voltage is likely to cause damage to the product as well as the electrical component it is being powered by.

Do not bring this product or any of its components in contact with any water or extreme heat.

Keep between 23 degrees F & 104 degrees F, and below a humidity of 95%.

Do not use this product outside of its intended and advertised use. Do not tamper with internal parts or wiring.

Brightech is not responsible for any failures associated with modifications to this product or any of its electrical components, or when the product is used with externally purchased parts not manufactured to come with this product.

FURTHER RESOURCES | Diagnosis

Though all of our products pass rigorous pre-production quality control, we understand that sometimes things can happen. If your product is experiencing any abnormalities, please see below fo some more insight as to what may be happening & if there's anything you can do to troubleshoot. If the purchase is covered under warranty, notify us of any weaknesses or malfunctions as soon as they are discovered.
Note: Never make any temporary or permanent alterations to any parts or components of this product.

Physical or Cosmetic Damage: If the damaged portions of the product are among the separate pieces listed on the opposite side of this guide (see: Assembly), these pieces might be able to be replaced. However any parts that are connected to other parts by wiring are considered one full piece as a unit.

Light Flashing or Strobing: A malfunction of this sort may suggest a problem with the power adapter cord, necessitating a replacement of the cord.

Lights are Dim: If the LEDs have dimmed, or the lamp has failed after first not performing at max brightness, this may suggest a failure of the actual LED component, necessitating a replacement of the full piece containing the LEDs.

Wireless Charging not working: The wireless charging pad will only work with devices made to be compatible with wireless charging. Additionally, metal on the charging shelf will block charging capacity. If your device is compatible and there is no metal on the shelf or your case, and your device is not charging when placed on the wifi pad, the wireless charger may need to be replaced.

SPECIFICATIONS

Wattage | 13 watts / Charger 5 watts
Brightness | 1070 lumens
Color Temperature | 3000K Warm White
Adapter Specifications | Input: AC100-240V
Output: DC24V/1A

Need More Help?

Find us on the web
www.brightech.com

Connect with us
@wearebrightech

For questions or support
www.brightech.com/contact