
BRIGHTECH

The Saturn RGB Floor Lamp

ASSEMBLY

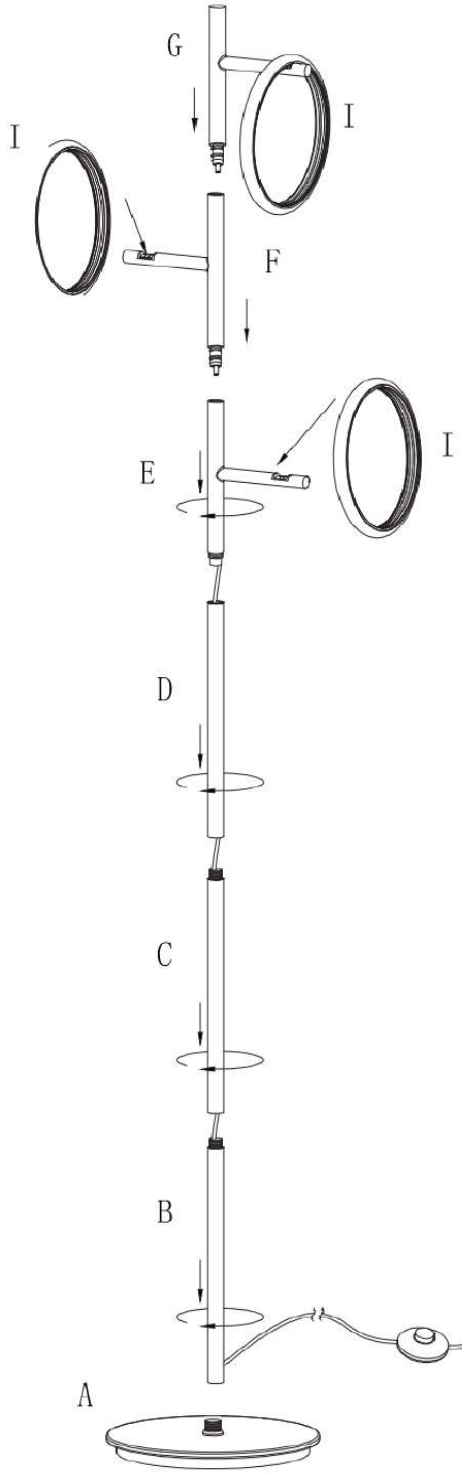

1. Screw the bottom pole (part B) onto the base (part A).
2. Screw together poles C, D, and E. Gently pull excess cord from the bottom of pole B, making sure it doesn't get caught in the threading.
3. To connect pole extension heads (parts F & G), apply gently pressure at connection points until you hear a click. If only two lights are desired, you can leave off pole F, and attach pole G direction to pole E.
4. Place LED rings (part I) onto the grooved slots on the pole stems.
5. Plug the power adapter cord (part H) into the cord that comes out of the lamp.
6. Plug the opposite end of the cord into a 110v outlet. Review re-

OPERATION & USE

The Saturn RGB lamp is controlled via a three-step foot pedal switch located on the power supply cord. To power properly and prevent long-term damage to the electrical wiring, do not power the lamp on/off for an extended amount of time by removing the rings from the grooves.

Powering on and off cycles through the 3 modes in this order:

Mode 1 - RGB color changing mode

Mode 2 - Fixed colro mode, based on where the gradient was turned off in Mode 1

Mode 3 - Cool white mode

To customize the rings to remain on or rotate at separate colors, pick up the rings when the lamp is turned on and re-place them on the grooves, to cycle through the modes on a ring-by-ring basis.

Please note, this lamp is not dimmable and is not compatible with smart plugs, timers, or wall switches at this time.

SAFETY & WARNINGS

This product is intended for 110v voltage only. Use with a higher voltage is likely to cause damage to the product as well as the electrical component it is being powered by.

Do not bring this product or any of its components in contact with any water or extreme heat.

Keep between 23 degrees F & 104 degrees F, and below a humidity of 95%.

Do not use this product outside of its intended and advertised use. Do not tamper with internal parts or wiring.

Brightech is not responsible for any failures associated with modifications to this product or any of its electrical components, or when the product is used with externally purchased parts not manufactured to come with this product.

FURTHER RESOURCES | Diagnosis

Though all of our products pass rigorous pre-production quality control, we understand that sometimes things can happen. If your product is experiencing any abnormalities, please see below fo some more insight as to what may be happening & if there's anything you can do to troubleshoot. If the purchase is covered under warranty, notify us of any weaknesses or malfunctions as soon as they are discovered.

Physical or Cosmetic Damage: If the damaged portions of the product are among the separate pieces listed on the opposite side of this guide, these pieces might be able to be replaced. However any parts that are connected to other parts by wiring are considered one full piece as a unit.

Light Flashing or Strobing: A malfunction of this sort may suggest a problem with the power adapter cord, necessitating a replacement of the cord.

Lights are Dim: If the LEDs have dimmed, or the lamp has failed after fi rst not performing at max brightness, this may suggest a failure of the actual LED component, necessitating a replacement of the rings.

Color Settings Malfunctioning: If the color settings are not working as described in the "Operation & Use" section, the wiring may be faulty, and the lamp in need of replacement.

SPECIFICATIONS

Wattage |	15 watts
Brightness |	550 lumens
Color Temperature Range |	W: 11000K R: 620NM G: 520NM B: 465NM
Adapter Specifications |	Input: AC100-240V Output: DC24V/1A

Need More Help?

Find us on the web
www.brightech.com

Connect with us
@wearebrightech

For questions or support
www.brightech.com/contact