
BRIGHTECH

The Serena Table Lamp

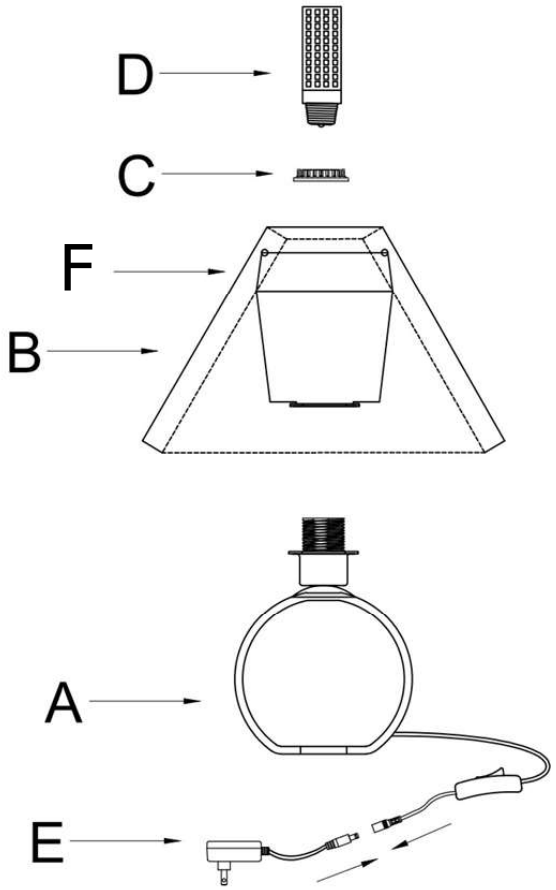


ASSEMBLY

The lampshade (part B) comes packed inside-out in the box for protection during shipment. See diagram below for a depiction of the shade assembly detailed in steps 1, 2, and 6.

1. First, slide the end of the shade with the slits into the wire frame's double-ringed opening, taking care that the pleats are evenly distributed across the circumference of the ring (not tightly scrunched into one section).
2. Using both hands, gently open up each pleat to feed the upper wire into the slits, until the shade is fully attached and each section contains a roughly even amount of pleats.
3. Unscrew & remove the socket ring (part C) from the lamp's socket.
4. Screw the LED corn bulb (part D) into the socket.
5. Slide the partially-assembled shade onto the socket. Then affix it onto the lamp by sliding the socket ring back over the socket and re-screwing it onto the lamp until the shade is secured.
6. Next, gently push the shade fabric outwards and then downwards until it flips over the frame. Take care not to risk damage from pushing too forcefully.
7. Plug the power adapter cord (part E) into the cord of the lamp.
8. Plug the cord into a 110v outlet. Review reverse side of this page for important warnings and safety information prior to use.

SHADE ASSEMBLY

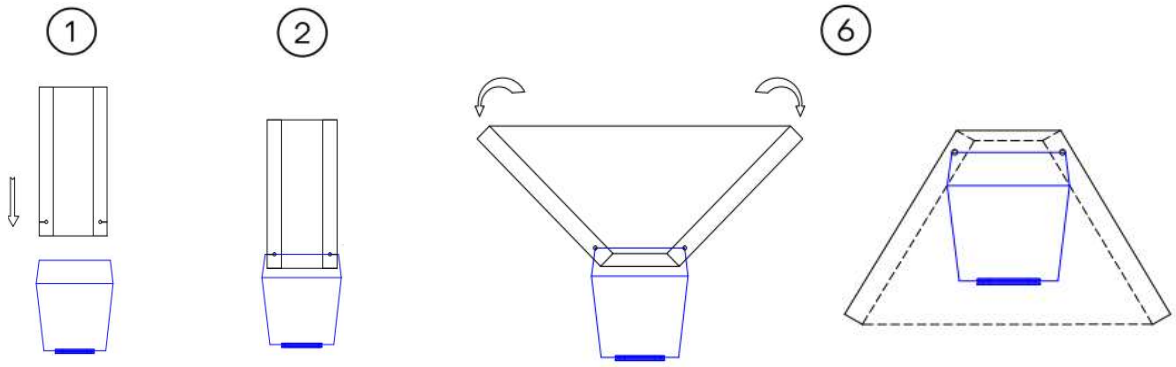

OPERATION & USE

POWER : The power button is located on the cord of the lamp, in the form of a flip switch. Simply flip to turn on and off as desired.

USING WITH A WALL SWITCH : To use this lamp with a wall switch, simply plug it into an outlet that is built to be powered with the wall switch. The lamp will be able to be turned on and off via the switch to the brightness level that it was on prior to being turned off. Dimming cannot be controlled via light switch and can only be adjusted via the controls witin the lamp itself.

SAFETY & WARNINGS

This product is intended for 110v voltage only. Use with a higher voltage is likely to cause damage to the product as well as the electrical component it is being powered by.

Do not bring this product or any of its components in contact with any water or extreme heat.

Keep between 23 degrees F & 104 degrees F, and below a humidity of 95%.

Do not use this product outside of its intended and advertised use. Do not tamper with internal parts or wiring.

Brightech is not responsible for any failures associated with modifications to this product or any of its electrical components, or when the product is used with externally purchased parts not manufactured to come with this product.

FURTHER RESOURCES | Diagnosis

Brightech's Limited Warranty applies exclusively to purchases made through Brightech.com or through our Authorized Merchants. Proof of purchas is required to establish eligibility for all warranty claims.

Though all of our products pass rigorous pre-production quality control, we understand that sometimes things can happen. If your product is experiencing any abnormalities, please see below fo some more insight as to what may be happening & if there's anything you can do to troubleshoot. If the purchase is covered under warranty, notify us of any weaknesses or malfunctions as soon as they are discovered.

Note: Never make any temporary or permanent alterations to any parts or components of this product.

Physical or Cosmetic Damage: If the damaged portions of the product are among the separate pieces listed on the opposite side of this guide (see: Assembly), these pieces might be able to be replaced. However any parts that are connected to other parts by wiring are considered one full piece as a unit.

Light Flashing or Strobing: A malfunction of this sort may suggest a problem with the power adapter cord, necessitating a replacement of the cord.

Lights are Dim: If the LEDs have dimmed, or the lamp has failed after first not performing at max brightness, this may suggest a failure of the actual LED component, necessitating a replacement of the LED bulb.

SPECIFICATIONS

Bulb Wattage | 5 watts

Bulb Voltage | 12v (cannot be replaced with a 110v bulb)

Color Temperature | 2700 kelvin

Brightness | 550 lumens

Bulb Tpe | E12 G9

Adapter | Input 110-220v | Output 12v / 1A

Need More Help?

Find us on the web
www.brightech.com

Connect with us
@wearebrightech

For questions or support
www.brightech.com/contact