

Brightech® Trilage LED Floor Lamp Assembly Instructions

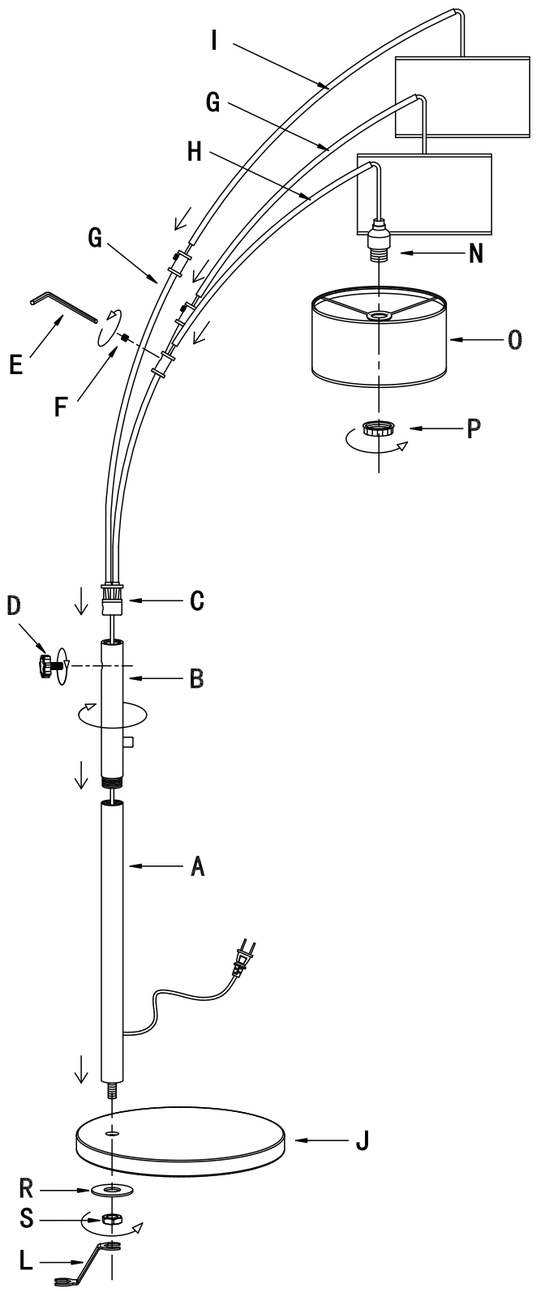

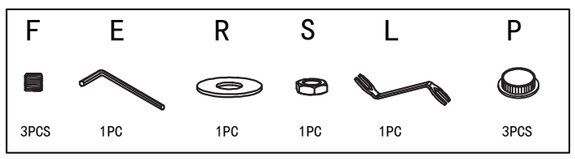

1. Screw pole (B) into pole (A). Place tri-head of lamp (C) on to pole (B) and tighten screw (D) into place on pole (B).
2. Attach tubes (H), (I), and (G) into place on the three limbs of tri-head (C) and tighten screw (F) into place using provided allen wrench (E).
3. Attach pole (A) to base (J). Use wrench (L) to tighten nut (S). Make sure that it's secured tightly in place.
4. Put shade (O) onto the socket (N) and lock the shade into place by screwing the socket ring (P).

Extend Your Warranty From 3 Years To 5 Years

To extend your warranty by an extra 2 years for a total of 5 years' warranty, register your purchase by filling in the brief form at **https://brightech.com/pages/extended-warranty.**

IMPORTANT SAFETY INSTRUCTIONS:

This product has a polarized plug(one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet in only one way. If the plug does not fit fully in the outlet,reverse the plug. If it still does not fit,contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. DO NOT ALTER THE PLUG.

Max Wattage: (3)60 watt incandescent or (3) 13 watt CFL equivalent. (Incandescent/CFL not included)
(3) 9.5 watt LED bulbs are included.

Please contact us via our website if you need any help with your new lamp.
www.brightech.com