
BRIGHTECH

The Athena Floor Lamp

LAMP ASSEMBLY


1. Slide the upper pole (part F) into the lower pole (part E).
2. Fasten together with the two included screws (parts J).
3. Place the metal ring (part D) over the hole on the top of the lamp's base (part C).
4. Slide the pole onto the base through the hole, then underneath the base slide, over the pole's threading the washer (part B), then the nut (part A).
5. Straighten the pole so that it is at a solid 90 degree angle to the base, then tighten the parts together by screwing them together from the bottom using the fastener tool (part K).
6. Assemble & attach the shade (see instructions below).
7. Plug the cord into a 110v outlet. Review reverse side of this page for important warnings and safety information prior to use.

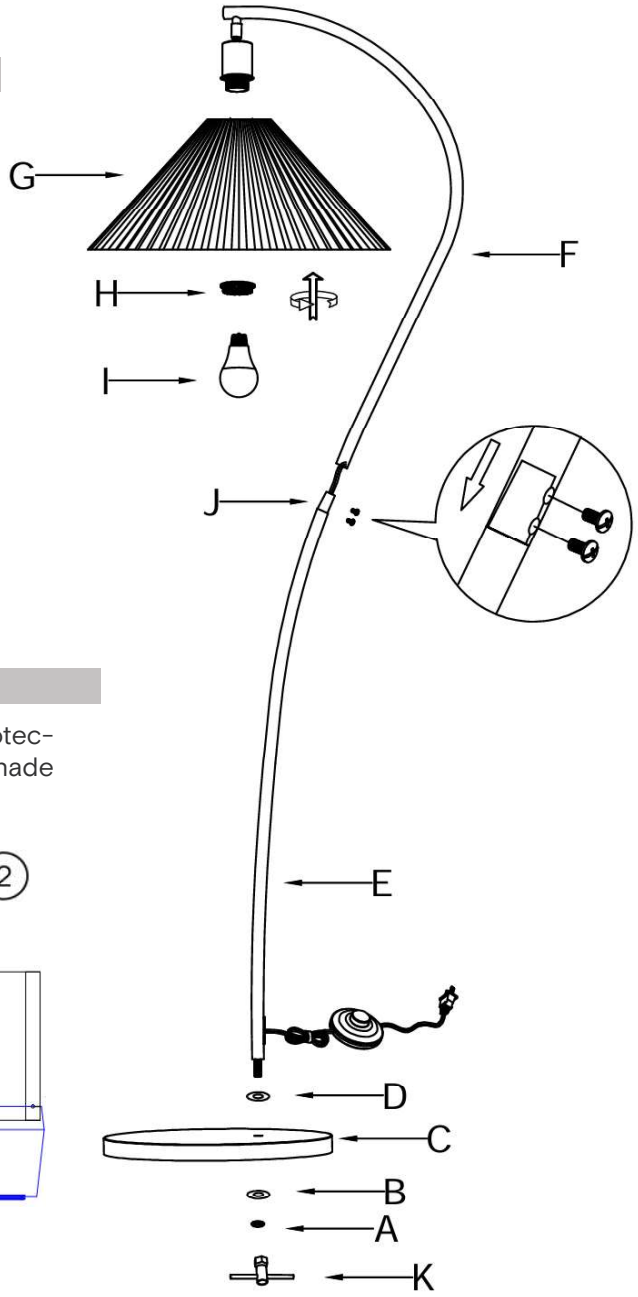


SHADE ASSEMBLY

The lampshade (part G) comes packed inside-out in the box for protection during shipment. See diagram below for a depiction of the shade assembly detailed in steps 1, 2, and 6.

1. First, slide the end of the shade with the slits into the wire frame's double-ringed opening, taking care that the pleats are evenly distributed across the circumference of the ring (not tightly scrunched into one section).
2. Using both hands, gently open up each pleat to feed the upper wire into the slits, until the shade is fully attached and each section contains a roughly even amount of pleats.
3. Unscrew & remove the socket ring (part H) from the lamp's socket.
4. Screw the LED bulb (part I) into the socket.
5. Slide the partially-assembled shade onto the socket. Then affix it onto the lamp by sliding the socket ring back over the socket and re-screwing it onto the lamp until the shade is secured.
6. Next, gently push the shade fabric outwards and then downwards until it flips over the frame. Take care not to risk damage from pushing too forcefully.

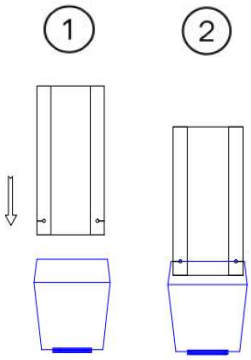

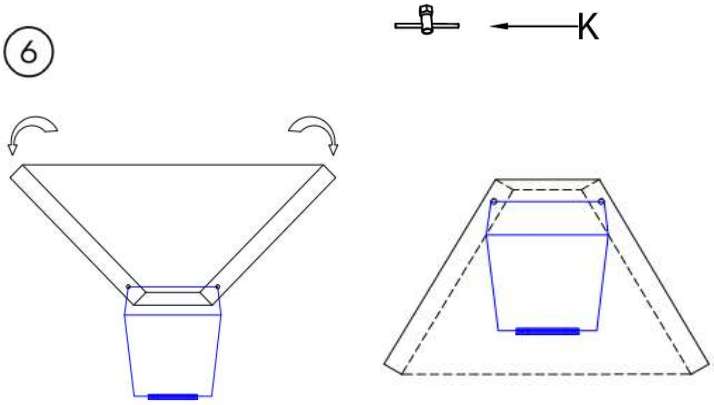

OPERATION & USE

POWER : To turn the lamp On or Off, simply tap the power button on the cord of the lamp (take care not to step too vigorously though, as this can cause damage to the control switch).

CUSTOMIZING THE BULB : This lamp's controls out of the box are on/off and the 9-watt bulb that emits a warm white light at 3000 Kelvin, which is ideal for a host of lighting environments. If desired, this bulb may be swapped out for a different bulb, including a dimming and/or color-changing smart bulb to increase customizability. Bulb specifications should not exceed the maximums represented in the Specifications below.

USING WITH A WALL SWITCH : To use this lamp with a wall switch, simply plug it into an outlet that is built to be powered with the wall switch, and turn the lamp On via the lamp's power button. The lamp will then be able to be turned on and off via the switch.

SAFETY & WARNINGS

This product uses a polarized plug so one prong is larger than the other. When plugging into an outlet, take care to plug the correct direction to avoid electric shock.

This product is intended for 110v voltage only. Use with a higher voltage is likely to cause damage to the product as well as the electrical component it is being powered by.

Do not bring this product or any of its components in contact with any water or extreme heat.

Keep between 23 degrees F & 104 degrees F, and below a humidity of 95%.

Do not use this product outside of its intended and advertised use. Do not tamper with internal parts or wiring.

Brightech is not responsible for any failures associated with modifications to this product or any of its electrical components, or when the product is used with externally purchased parts not manufactured to come with this product.

FURTHER RESOURCES | Diagnosis

Though all of our products pass rigorous pre-production quality control, we understand that sometimes things can happen. If your product is experiencing any abnormalities, please see below fo some more insight as to what may be happening & if there's anything you can do to troubleshoot. If the purchase is covered under warranty, notify us of any weaknesses or malfunctions as soon as they are discovered.
Note: Never make any temporary or permanent alterations to any parts or components of this product.

Physical or Cosmetic Damage: If the damaged portions of the product are among the separate pieces listed on the opposite side of this guide (see: Assembly), these pieces might be able to be replaced. However any parts that are connected to other parts by wiring are considered one full piece as a unit.

Light not Working: If the bulb is not working, the metal tab in the socket might have pushed in too much during production. Try unplugging the lamp and pulling out the tab slightly, to help create a connection between the two. If this doesn't fix the problem, we recommend trying to swap with another bulb. If the new bulb doesn't fix the issue, the lamp might be defective.

SPECIFICATIONS

Wattage of Bulb | 9 watts
Color Temperature | 3000 kelvin
Brightness | 800 lumens
Bulb Sizing | E26 Base / A19 Shape
Maximum Wattage of Socket | 100 watts

Need More Help?

Find us on the web
www.brightech.com

Connect with us
@wearebrightech

For questions or support
www.brightech.com/contact